

TRASFORMATORI MONOFASE E TRIFASE DI SICUREZZA – Serie TMS e T3FS

Normative di riferimento CEI EN 61558-2-6


I trasformatori della serie TMS-T3FS sono destinati ad alimentare circuiti a bassissima tensione.

La tensione secondaria nominale e la tensione secondaria a vuoto non devono superare i 50 V.

Su richiesta le dimensioni possono essere variate per soddisfare eventuali esigenze di ingombro.

La nostra produzione di serie ha le seguenti caratteristiche:

- Classe di Isolamento : E
- Frequenza : 50 /60 HZ
- Classe di protezione : I
- Grado di protezione : IP00
- Impregnati in resina
- Tropicalizzati

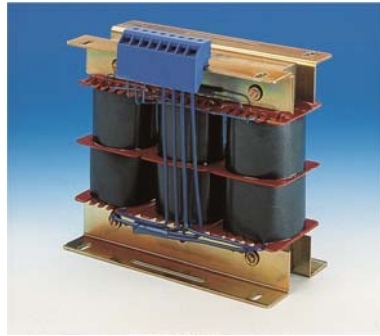

SINGLE PHASE AND THREE PHASE TRANSFORMERS SAFETY – TMS and T3FS Series

Standards CEI EN 61551-2-6

The transformers of TMS and T3FS Series are intended to feed very low-voltage circuits.

Secondary nominal voltage and secondary no-load voltage must not go over 50 V.

On request, the dimensions can be varied in according to space available.

Our series production have the following details:

- Insulation class : E
- Frequency: 50 /60 HZ
- Electrical protection class : I
- Protection index : IP00
- Impregnated
- Tropicalized



CODICE CODE	POTENZA VA	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	WEIGHT (Kg)	CASSETTA CASE
TMS216	25	70	85	68	45	48	0.88	-
TMS085	30	70	85	68	45	48	0.92	-
TMS217	40	86	97	83	60	57	1.32	-
TMS086	50	86	97	83	60	57	1.4	-
TMS218	63	86	97	88	60	62	1.6	-
TMS087	75	86	97	93	60	67	1.85	-
TMS088	100	99	105	93	68	68	2.4	-
TMS089	150	99	105	103	68	78	3	-
TMS219	160	99	105	103	68	78	3	-
TMS090	200	99	105	113	68	88	3.6	CASS172
TMS091	250	122	126	98	82	72	4.3	CASS172
TMS092	300	122	126	118	82	91	5.2	CASS172
TMS093	400	122	126	128	82	101	6.4	CASS172
TMS094	500	150	150	125	105	95	7.4	CASS172
TMS095	600	150	150	125	105	95	8	CASS172
TMS220	630	150	150	125	105	95	8.5	CASS172
TMS096	750	150	100	145	105	114	10.5	CASS172
TMS097	1000	150	160	155	105	124	12	CASS172
TMS098	1500	193	220	175	160	108	19	CASS173
TMS221	1600	193	220	175	160	108	20	CASS173
TMS099	2000	193	220	205	160	138	25	CASS173



TMS100	2500	193	230	250	160	168	30	CASS186
TMS101	3000	193	230	250	160	168	32	CASS186
TMS102	4000	193	250	270	160	120	36	CASS186
TMS103	5000	250	360	190	180	120	41	CASS174
TMS104	6000	250	360	200	180	120	45	CASS174
TMS222	6300	250	360	200	180	120	47	CASS174
TMS105	7500	280	400	250	210	190	68	CASS175
TMS106	10000	280	400	280	210	210	77	CASS175

CODICE CODE	POTENZA KVA	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	WEIGHT (Kg)	CASSETTA CASE
T3FS200	0,500	180	175	120	150	90	9	CASS172
T3FS201	0,630	180	175	120	150	90	10	CASS172
T3FS202	1	180	175	130	150	100	11	CASS172
T3FS203	1,5	240	235	150	200	95	16	CASS173
T3FS204	1,6	240	235	150	200	95	17	CASS173
T3FS205	2	240	235	170	200	105	20	CASS173
T3FS206	2,5	240	235	200	200	130	28	CASS173
T3FS207	3	240	235	200	200	130	29	CASS173
T3FS208	4	300	300	150	215	90	34	CASS186
T3FS209	5	300	300	170	215	110	43	CASS186
T3FS210	6,3	360	350	170	215	140	55	CASS174
T3FS211	7,5	360	350	170	215	140	57	CASS174
T3FS212	10	360	350	170	215	140	61	CASS174
T3FS213	12,5	420	410	260	350	140	65	CASS174
T3FS214	15	420	410	280	350	150	110	CASS175
T3FS215	16	420	410	280	350	150	115	CASS175

